

# Fetchin' Farmgirl Table Runner

51" x 25½"

## YOU'LL NEED:

**Fabric 1** (4150LR—redwork panel print)  
½ yard for large squares and 4-patch units

**Fabrics 2, 3 and 4** (4156G—green/pink/red stripe, 4153R—red/green/cream squares and 4157R—red/white stripe):  
1 fat quarter each for large squares

**Fabric 5** (4219R—red farmgirl panel print):  
⅔ yard for center square and side units

**Fabrics 6, 7 and 8** (4153B—red/blue/cream squares for G, 4157E—pink/white stripe for H and 4151C—red rose print for I):  
1 fat quarter each for side units

**Fabric 9** (4219G—green farmgirl panel print):  
⅔ yard for side units

## CUTTING:

Mark pieces with assigned letters. Piecing instructions will refer to letters only.

### Fabric 1:

- Fussy-cut (4) 6½" x 6½" A squares

### Fabric 2:

- Cut (6) 6½" x 6½" B squares

### Fabric 3:

- Cut (4) 6½" x 6½" C squares

### Fabric 4:

- Cut (4) 6½" x 6½" D squares

### Fabric 5:

- Fussy-cut (1) 12½" x 12½" E square
- Fussy-cut (8) 3½" x 3½" F squares from lacy edge print

### Fabrics 6, 7 and 8:

- Cut (8) 3½" x 3½" G squares fabric 6
- Cut (2) 3½" x 3½" H squares fabric 7
- Cut (6) 3½" x 3½" I squares fabric 8

### Fabric 9:

- Fussy-cut (8) 3½" x 3½" J squares from lacy edge print

### Fabric 10

- Cut (3) 2½" x 42" binding strips

### Leftover fabric scraps

- Cut 12 total 2½" x 2½" K squares for center block corners



**Fabric 10** (4156B—blue/green/red stripe)  
⅓ yard for binding

Backing: 59" x 34" or 1¾ yards  
Batting: 59" x 34"

Temporary adhesive spray/quilt basting spray  
Water soluble marker

## ASSEMBLING AND STITCHING DETAILS

Seam allowance: 1/4" unless otherwise noted

Refer to the diagrams for placement during piecing

### Backing and Batting Preparation

*Note: You will be quilting at the same time as you sew the units together.*

1. Cover the batting with a piece of fabric and press it flat. *Note: Fabric protects the batting from the heat of the iron.*
2. Lay pressed batting out flat and spray with temporary adhesive spray, following the manufacturer's instructions.
3. Layer the backing fabric (right side up) on the adhesive side of the batting, making sure fabric lays flat against the batting (no wrinkles).
4. Fold the batting/backing fabric piece in half (batting on inside of fold) widthwise/lengthwise and draw lines at fold lines on the batting with a water soluble marker.

### Piecing the Center Block

1. Join four different K squares to make one K 4-patch unit, pressing seams in rows of units in opposite directions. Repeat to make four K units.
2. Draw a diagonal line from corner to corner on the wrong side of each of the K units.
3. Center and pin the E square right side up on the batting side of the prepared batting/backing piece using the marked lines on the batting as guides for centering.
4. Center a K unit on each side of E with marked lines 1/4" from the edge of E and stitch on the marked lines through all layers referring to Diagram 1. Use scissors to trim K sections even with edges of E. Do not cut through batting/backing layers. Carefully press the K units to the right side.
5. Mark a line from K unit to K unit across the corners of E referring to Diagram 2. Trim off each corner of E even with the K units.




Diagram 1

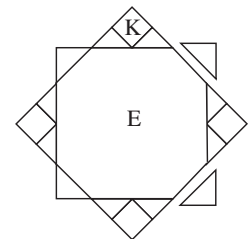


Diagram 2


### Adding the Side Units

*Note: Refer to Diagram 3 for all instructions in this section. You will be sewing pieced units through the batting/backing layers. Be careful when pressing to avoid touching the batting with the iron.*


1. Join the F, G, H, I and J squares in random sets of four to make eight pieced strips. Press seams in one direction. Join two pieced strips along length to make (4) 6 1/2" x 12 1/2" side units. Press seams to one side.
2. Sew a side unit to opposite sides of the center block through all layers; press.
3. Sew an A square to one end and a B square to the other end of each remaining side unit; press seams toward A and B squares.
4. Sew the A/B side units to the remaining sides of the center block through all layers; press.
5. Join the remaining A, B, C and D squares to make 3-square and 4-square end units. Press seam allowances in one direction.
6. Sew the 3-square end units to the pieced section and add the 4-square end units, to complete the pieced section. Press end units flat.

### Trimming Edges & Binding


1. Align your rotary ruler 1/4" away from the corners of the side units and trim away the excess B triangles referring to Diagram 4. *Note: This gives you a 1/4" seam allowance.*
2. Trim batting and backing even with the runner edges.
3. Join the binding strips on the short ends with diagonal seams to make one long strip; press seams open.
4. Fold the binding in half along length with wrong sides together to make a double layer; press.
5. Stitch binding to the right side of the quilt top with raw edges even, mitering corners and overlapping the ends.
6. Turn the binding to the back side and hand-stitch in place to finish.

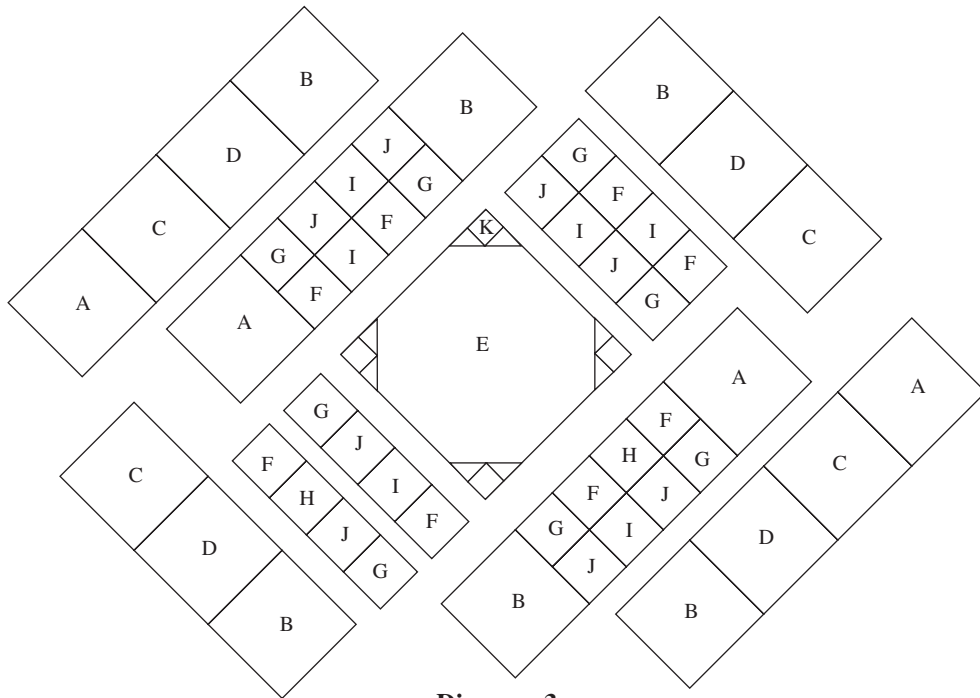

**Diagram 3**

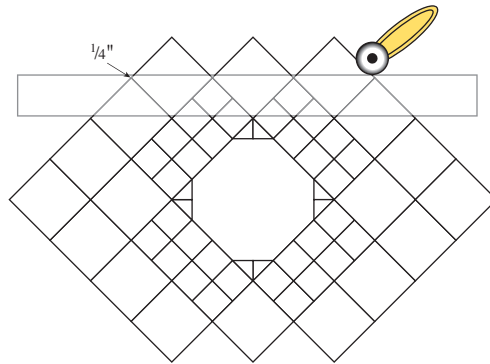

**Diagram 4**

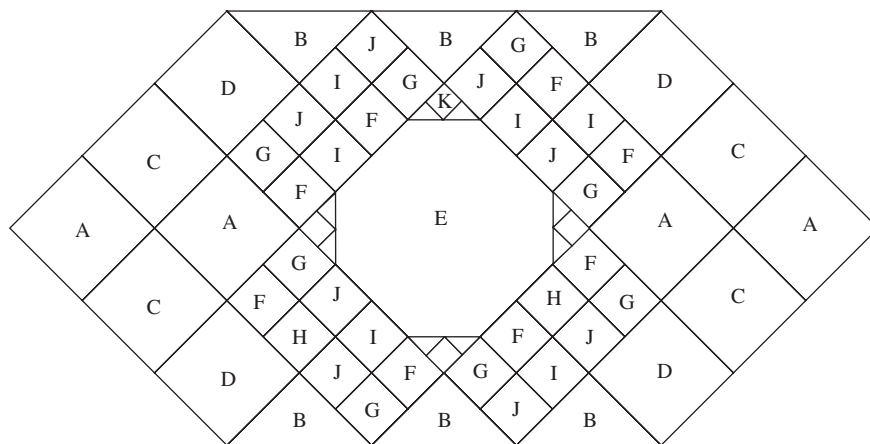

**Assembly Diagram**