Three Farmgirls Wall Hanging 20" x 461/4"

YOU'LL NEED:

Fabric 1 (4219G–green farmgirl print): 1 panel (²/₃ yard) for blocks and inside border and outside pieced border

Fabric 2 (4151C–red rose print): ½ yard for sashing and outside pieced border

Fabric 3 (4155G–green/white print): ½ yard for sashing squares, outside pieced border and binding

Fabrics 4–9 (4156B–green/pink/red strip, 4153B–red/blue/ cream squares, 4153R–red/green/cream squares, 4157E– pink/white stripe, 4157R–red/white strips, 4151L–pink rose print, 4156B–blue/green/red stripe, 4152R–red bandana stripe and 4156G–green/pink/red stripe): ¼ yard each fabric for pieced borders

Backing Fabric: 28" x 54" or 1½ yards Batting: 28" x 54"



CUTTING:

Mark pieces with assigned letters. Piecing instructions will refer to letters only. When cutting pieces listed from Fabrics 1–3, cut a few extra strips in varying widths from $1\frac{4}{-2\frac{1}{2}}$ for outside pieced border.

Fabric 1:

- Fussy cut (3) 10¹/₂" x 11¹/₄" A rectangles for blocks, centering a motif in each square
- Fussy cut (2) 1" x 15½" F strips
- Fussy cut (2) 1" x 40¾" E strips

Fabric 2:

- Cut (4) 2¹/₂" x 10¹/₂" B strips
- Cut (6) 2¹/₂" x 11¹/₄" C strips

Fabric 3:

- Cut (8) 2¹/₂" x 2¹/₂" D squares
- Cut (4) 2¹/₂" x 42" binding strips

Fabrics 4–7:

• Cut strips in varying widths from $1\frac{1}{4}$ " $-2\frac{1}{2}$ " for outside pieced border

ASSEMBLING, STITCHING, AND FINISHING DETAILS

Seam allowance: ¹/₄" unless otherwise noted. RST = Right Sides Together

Refer to Assembly Diagram for placement during piecing.

1. Join four A blocks with four B strips to make the center row; press seams toward B.

2. Join three C strips with four D squares to make a sashing row; repeat to make two rows. Press seams toward C.

3. Sew a sashing row to each side of the center row; press seams toward sashing rows.

4. Sew an E strip to each long side and an F strip to the top and bottom; press seams toward E and F.

5. Sew the varying width strips cut for outside pieced border RST along length in random order; press seams in one direction. *Note: Refer to color photo for stitching order in the sample quilt.*

6. Subcut the pieced strip into two 3" x 41³/₄" G strips and two 3" x 20¹/₂" H strips.

7. Sew a G strip to each long side and an H strip to the top and bottom of the pieced center; press seams toward G and H.

FINISHING

1. Place the batting between the stitched top and backing; pin or baste layers together for quilting.

2. Quilt as desired by hand or machine; remove pins or basting.


3. Join the binding strips on the short ends with diagonal seams to make one long strip; press seams open.

4. Fold the binding in half along length with wrong sides together to make a double layer; press.

5. Stitch binding to the right side of the quilt top with raw edges even, mitering corners and overlapping the ends.

6. Turn the binding to the back side and hand-stitch in place to finish.

Complete quilt by adding embellishments.

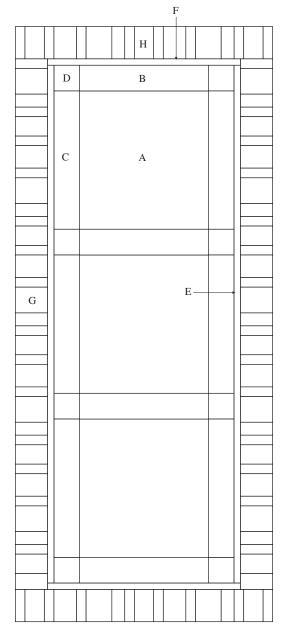

Assembly Diagram